




NST
NILES
STEEL
TANK
SINCE 1898

Expansion Bladder Tanks

Larger sizes upon request

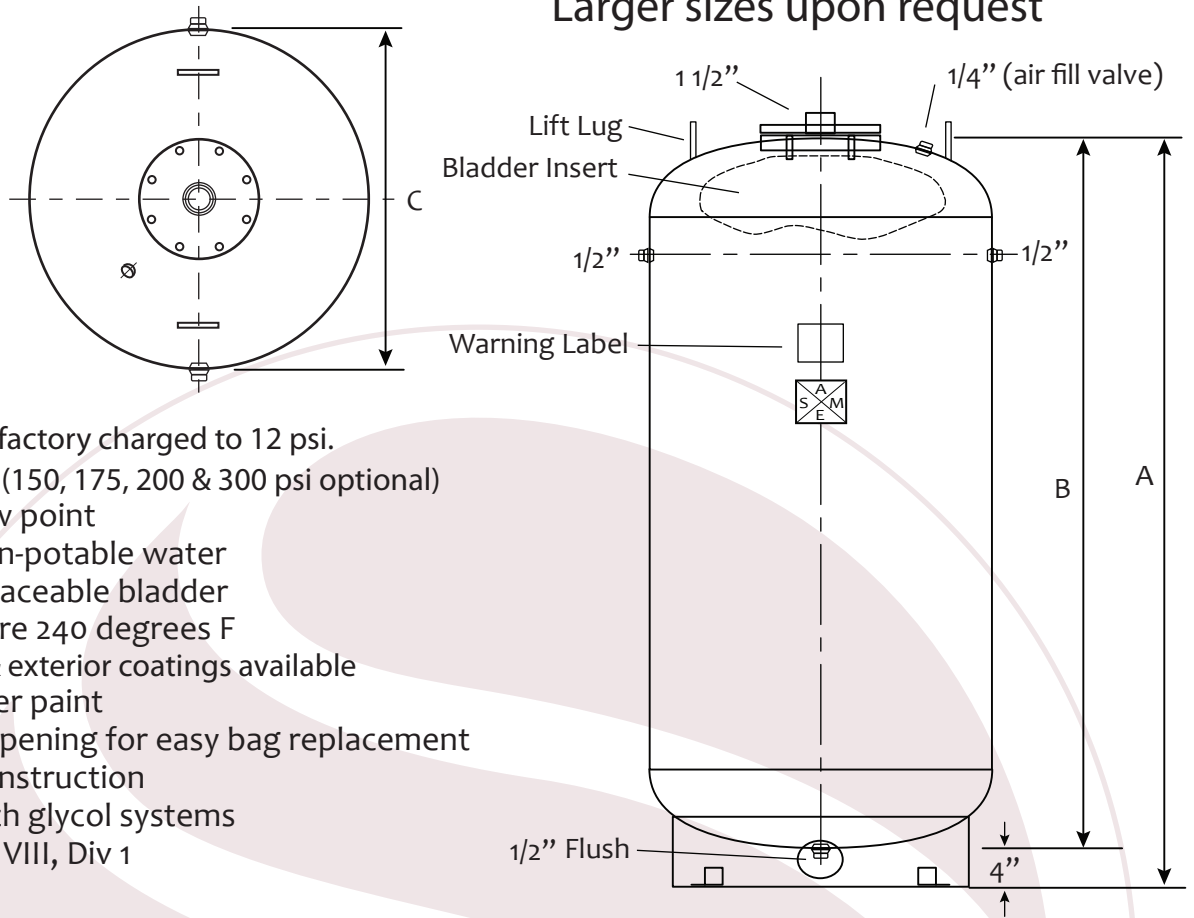

- Bladder tank are factory charged to 12 psi.
- 125 psi standard (150, 175, 200 & 300 psi optional)
- Dried to -50 dew point
- For use with non-potable water
- Heavy duty replaceable bladder
- Max temperature 240 degrees F
- Special interior & exterior coatings available
- Red oxide primer paint
- Large flanged opening for easy bag replacement
- Carbon steel construction
- Can be used with glycol systems
- ASME code Sec VIII, Div 1
- 1 Year warranty

Model	Gallons	(A) Overall Height	(B) Tank Height	(C) Diameter	System connection	Working Pressure	Weight
EBT-30-063	175	67"	63"	30"	1-1/2"	125	465
EBT-30-075	210	79"	75"	30"	1-1/2"	125	505
EBT-30-085	240	89"	85"	30"	1-1/2"	125	550
EBT-36-072	285	76"	72"	36"	1-1/2"	125	675
EBT-36-078	310	82"	78"	36"	1-1/2"	125	707
EBT-36-085	340	89"	85"	36"	1-1/2"	125	750
EBT-36-090	360	94"	90"	36"	1-1/2"	125	780
EBT-42-081	435	85"	81"	42"	1-1/2"	125	1186
EBT-42-084	453	88"	84"	42"	1-1/2"	125	1216
EBT-42-093	505	97"	93"	42"	1-1/2"	125	1304
EBT-48-073	500	77"	73"	48"	1-1/2"	125	1293
EBT-48-096	675	100"	96"	48"	1-1/2"	125	1550
EBT-48-108	765	112"	108"	48"	1-1/2"	125	1685
EBT-48-120	860	124"	120"	48"	1-1/2"	125	1870
EBT-48-141	1040	145"	141"	48"	1-1/2"	125	2053

rev 07.31.15